
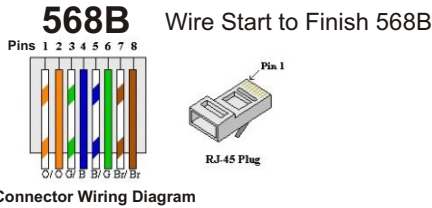
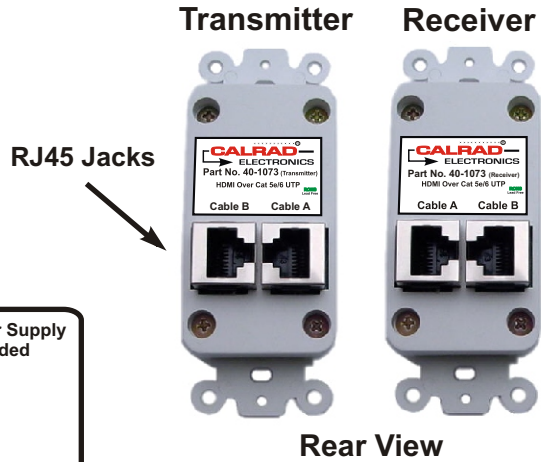


CALRAD
ELECTRONICS


819 N. Highland Ave.
Los Angeles, CA 90038

Tel (323) 465-2131, Fax (323) 465-3504
Visit us on the web at www.calrad.com

Part No. 40-1073
Active Decora Wallplate Balun,
HDMI over 2 Cat5e/Cat6 Cables

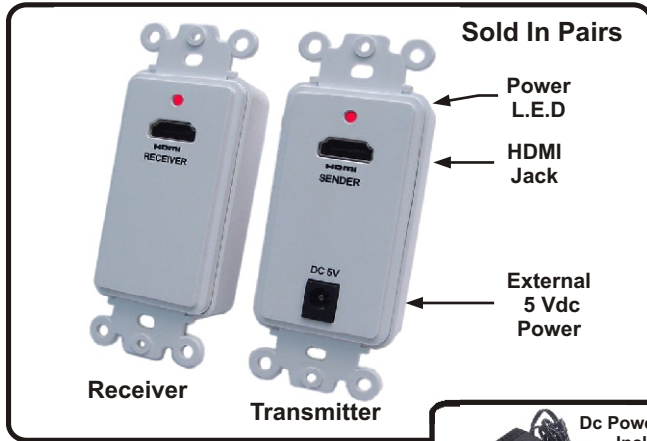

Transmitter

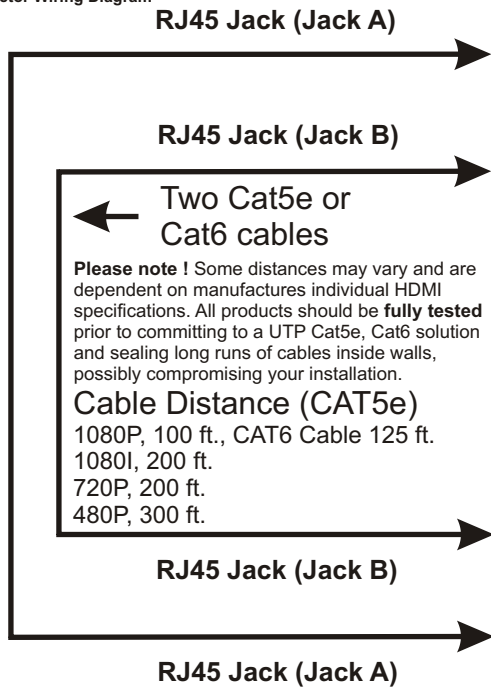


Please note ! Some distances may vary and are dependent on manufactures individual HDMI specifications. All products should be **fully tested** prior to committing to a UTP Cat5e, Cat6 solution and sealing long runs of cables inside walls, possibly compromising your installation.

Cable Distance (CAT5e)
1080P, 100 ft., CAT6 Cable 125 ft.
1080I, 200 ft.
720P, 200 ft.
480P, 300 ft.



HDMI-Input



Up to 6 Ft. HDMI Cable Max

Receiver



HDMI-Output



Up to 6 Ft. HDMI Cable Max



**Satellite, STB,
Media PC, Bluray**



**Plasma, LCD Monitor,
DLP Projector**



Specifications:

HDTV Resolutions: 480P, 720P, 1080I, 1080P (Max 4.95Gbps, HDMI 1.3)
Input TMDS Signal: 5Vpp, Input DDC 5Vpp
HDMI In/Out Connectors: 19 pin Female Jacks, 2 x RJ45 Shielded Jacks each unit.
DC Power Supply: 5V, 1A, Switchmode Regulated, 110-220Vac (Optional, only required when there is no power from the receiver side HDMI connector)
Housing: Plastic, White Color
Weight: 200g ea.
Dimensions: Transmitter / Receiver: L-2.91" x W-1.59" x D-1.25"