





819 N. Highland Ave.
 Los Angeles, CA 90038
 Tel (323) 465-2131, Fax (323) 465-3504
 Calrad Website: www.calrad.com
 xLobby Website: www.xlobby.com

72-143 USB 4 Port Type 'A' Hub With USB-IF Battery Specification 1.1

Calrad's 4-port smart charger hub is compliant with the USB 2.0 specification. It is able to support 12 M transmission distance and comply with USB-IF Battery charging specification 1.1. This Hub has USB charging detection circuitry, so each port supports battery charging capabilities, but only one can be the Battery charger port at the same time. On the other hand, users can only select one of four ports as the designated port for charging a battery at the same time. You can still use the other ports for connecting up to 3 additional USB 2.0 devices to your computer, such as an MP3 player, digital camera, or memory stick. The streamlined, sleek and compact design is the perfect solution for permanent or portable USB port expansion.

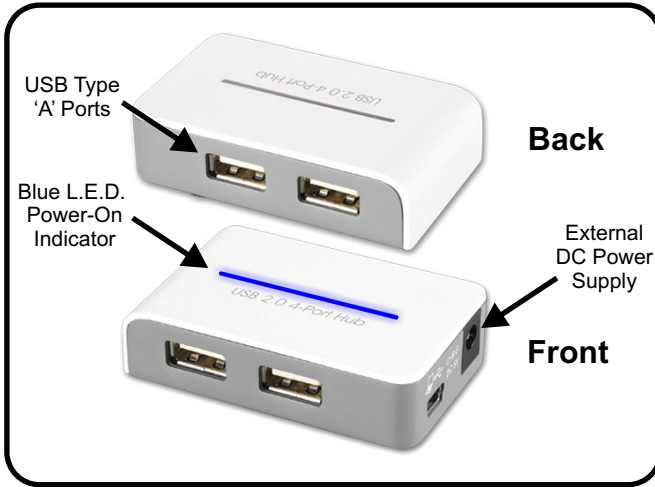

(1.5A) Fast Charge
 Available on all 4 ports

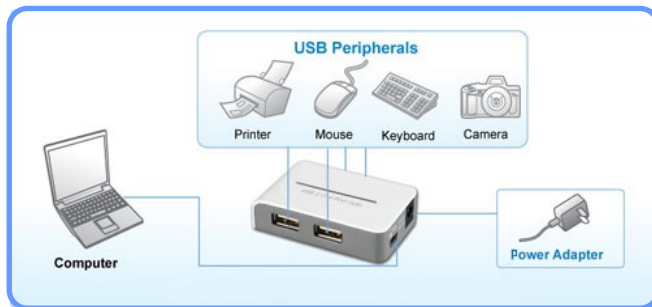

Typical Hookup

System Requirement

Desktop PC or notebook with a USB port and one of the following operating systems (no driver needed): Windows® 2000, Windows® XP, Windows Vista® SP1 or SP2, Windows® 7, Mac OS® X v10.x or later.

Package Contents

USB 2.0 4-port Hub
 USB 'A' Male to 5P mini 'B' Male cable (1M)
 Power Adapter
 User's Manual

Function Specification

Ports: 1 upstream port and 4 downstream ports
 Compliance: FCC regulations for home or office use CE emissions
 Power Bus-Power: 5V 500mA
 External Power Supply: 5V, 4A
 Adapter: Input: 100~240v 50Hz-60Hz
 Output: 5V 4A
 Dimensions: 65.34mm (L) * 40.08mm(W) * 18.03mm (L)
 Storage Temperature: -10~85 degrees (Celsius)
 Working Temperature: 0~40 degrees (Celsius)



5Vdc Power Supply

USB Interface Cable

WB-72-143